


RECESSED HOSE REEL CABINET

DESCRIPTION

Side hand reel is fixed on right hand side (standard), for left hand on order. Door right hand hinged (standard), for left hand on order. Standard depth of cabinet (as drawing) suitable for hose reel fitted with 0.19mm x 30m hose. (Mod.RSCSA & RSCSB). Cabinets with 330mm depth are also available suitable for hose reels fitted with 025mm x 30m or 0 19mm x 35m hose. (Mod.RSCSA & RSCSB). 0 70mm water entry in hose reel compartment provided on left hand bottom corner of back side of cabinet. Other positions or diameter of water entry on order.

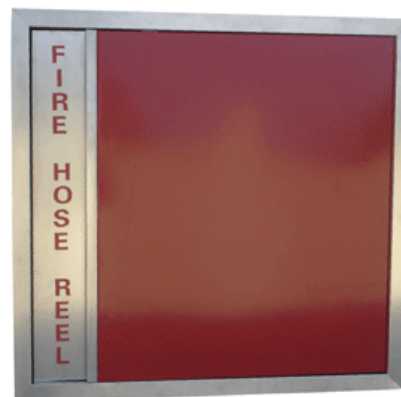


Fixings

1.Red colour metal doors with brushed satin stainless steel handles and architrave (Mod.RSCSA & RSCSB).
2 no 0 12mm holes on each side for M1 0 bolts.
Recommended wall openings: Width: 800mm
Height: 750mm - Depth: 310mm or 350mm.

Finishes:

Colour of body red. (other colours on order)
All paintings are made using epoxy polyester powder coating.. Self adhesive red colour letters are used throughout (white letters are used on red colour metal handles).

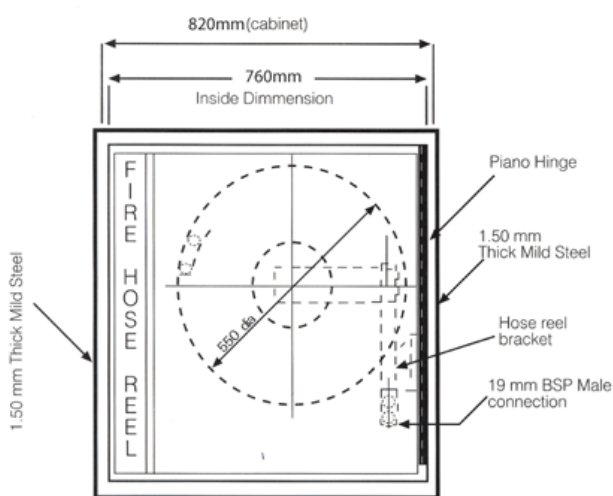

BULLETIN
GEO1000 REV. 0
PAGE 1 OF 1

Nett Weights
Cabinet & reel without hose-21kg
Hose reel tubing
19mm-0.6kg/m
25mm-0.8kg/m
Note:
All dimensions are
in millimetres



83, Geriou Avenue, 1654 Nicosia
Phone: 22 467200 Fax: 22 487388
www.Geomast.com
e-mail: geomast@cytanet.com.cy